

isc Silicon NPN Power Transistor

BUW46

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 450V(\text{Min.})$
- High Speed Switching

APPLICATIONS



- Intended in fast switching applications for high output powers.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	900	V
V_{CEO}	Collector-Emitter Voltage	450	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	15	A
I_{CM}	Collector Current-Peak	30	A
I_B	Base Current-Continuous	10	A
P_T	Total Power Dissipation @ $T_C \leq 25^\circ\text{C}$	175	W
T_J	Junction Temperature	200	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ\text{C}/\text{W}$

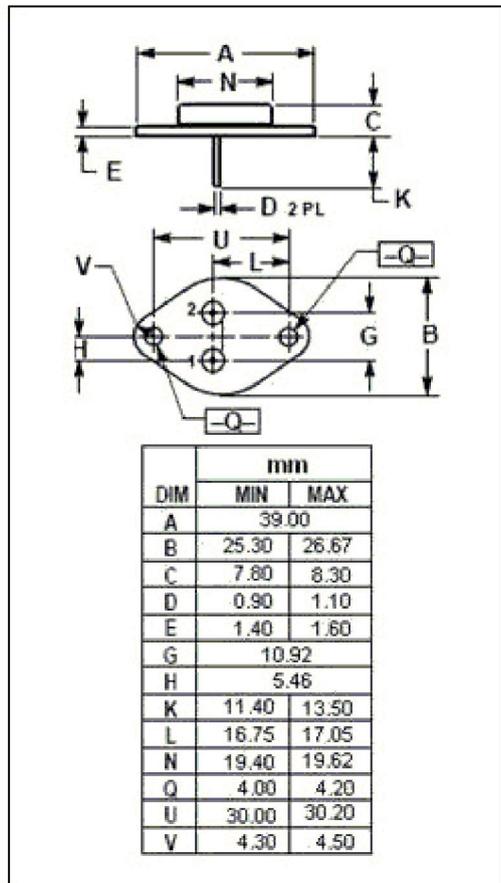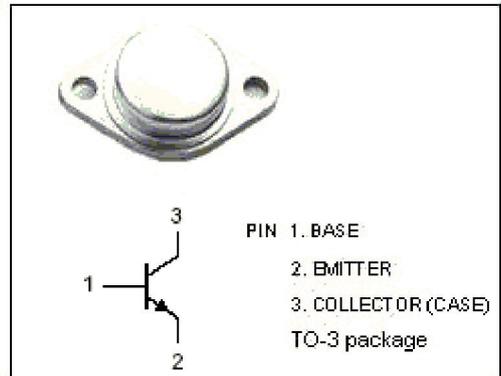

isc Silicon NPN Power Transistor

BUW46

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=0.1\text{A}; I_B=0$	450			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}; I_B=2\text{A}$			1.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=7\text{A}; I_B=1\text{A}$			1.5	V
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage	$I_C=10\text{A}; I_B=2\text{A}$			1.8	V
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage	$I_C=7\text{A}; I_B=1\text{A}$			1.4	V
I_{EBO}	Emitter cut-off current	$V_{EB}=7\text{V}; I_C=0$			1.0	mA
I_{CES}	Collector Cutoff Current	$V_{CE}=900\text{V}; V_{BE}=0$ $V_{CE}=900\text{V}; V_{BE}=0; T_C=125^\circ\text{C}$			0.5 3.0	mA
h_{FE}	DC Current Gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	15		50	

Switching Times; Resistive Load

t_{on}	Turn-On Time	$I_C=10\text{A}; I_{B1}=2\text{A}; V_{CC}=250\text{V}$			0.75	μs
t_s	Storage Time	$I_C=10\text{A}; I_{B1}=-I_{B2}=2\text{A}; V_{CC}=250\text{V}$			3.0	μs
t_f	Fall Time				0.8	μs