

ECOSPARK[®] 2 Ignition IGBT

300 mJ, 400 V, N-Channel Ignition IGBT

FGD3040G2-F085V

Features

- SCIS Energy = 300 mJ at $T_J = 25^\circ\text{C}$
- Logic Level Gate Drive
- AEC-Q101 Qualified and PPAP Capable
- RoHS Compliant

Applications



- Automotive Ignition Coil Driver Circuits
- Coil on Plug Application

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise stated)

| Symbol | Parameter | Value | Units |
|---------------|---|------------|---------------------|
| BV_{CER} | Collector to Emitter Breakdown Voltage ($I_C = 1\text{ mA}$) | 400 | V |
| BV_{ECS} | Emitter to Collector Voltage – Reverse Battery Condition ($I_C = 10\text{ mA}$) | 28 | V |
| E_{SCIS25} | Self Clamping Inductive Switching Energy (Note 1) | 300 | mJ |
| $E_{SCIS150}$ | Self Clamping Inductive Switching Energy (Note 2) | 170 | mJ |
| I_{C25} | Collector Current Continuous at $V_{GE} = 5.0\text{ V}$, $T_C = 25^\circ\text{C}$ | 41 | A |
| I_{C110} | Collector Current Continuous at $V_{GE} = 5.0\text{ V}$, $T_C = 110^\circ\text{C}$ | 25.6 | A |
| V_{GEM} | Gate to Emitter Voltage Continuous | ± 10 | V |
| P_D | Power Dissipation Total, $T_C = 25^\circ\text{C}$ | 150 | W |
| | Power Dissipation Derating, $T_C > 25^\circ\text{C}$ | 1 | W/ $^\circ\text{C}$ |
| T_J | Operating Junction and Storage Temperature | -55 to 175 | $^\circ\text{C}$ |
| T_{STG} | Storage Junction Temperature Range | -55 to 175 | $^\circ\text{C}$ |
| T_L | Max. Lead Temperature for Soldering (Package Body for 10 s) | 300 | $^\circ\text{C}$ |
| T_{PKG} | Max. Lead Temperature for Soldering (Package Body for 10 s) | 260 | $^\circ\text{C}$ |
| ESD | HBM – Electrostatic Discharge Voltage at 100 pF, 1500 Ω | 4 | kV |
| | CDM – Electrostatic Discharge Voltage at 1 Ω | 2 | kV |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Self clamped inductive Switching Energy (E_{SCIS25}) of 300 mJ is based on the test conditions that is starting $T_J = 25^\circ\text{C}$, $L = 3\text{ mH}$, $ISCIS = 14.2\text{ A}$, $V_{CC} = 100\text{ V}$ during inductor charging and $V_{CC} = 0\text{ V}$ during time in clamp.
2. Self Clamped inductive Switching Energy ($E_{SCIS150}$) of 170 mJ is based on the test conditions that is starting $T_J = 150^\circ\text{C}$, $L = 3\text{ mH}$, $ISCIS = 10.8\text{ A}$, $V_{CC} = 100\text{ V}$ during inductor charging and $V_{CC} = 0\text{ V}$ during time in clamp.

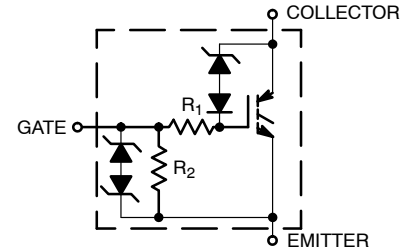

DPAK (SINGLE GAUGE)
CASE 369C

MARKING DIAGRAM



A = Assembly Location
Y = Year
WW = Work Week
FGD3040G2 = Device Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

FGD3040G2-F085V

THERMAL RESISTANCE RATINGS

| Characteristic | Symbol | Max | Units |
|---|-----------------|-----|-------|
| Junction-to-Case – Steady State (Drain) | $R_{\theta JC}$ | 1 | °C/W |

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min | Typ. | Max. | Units | |
|----------------------------|--|---|---------------------------|----------|------|----------|---------------|
| OFF CHARACTERISTICS | | | | | | | |
| BV_{CEr} | Collector to Emitter Breakdown Voltage | $I_{CE} = 2\text{ mA}$, $V_{GE} = 0\text{ V}$, $R_{GE} = 1\text{ k}\Omega$, $T_J = -40\text{ to }150^\circ\text{C}$ | 370 | 400 | 430 | V | |
| BV_{CES} | Collector to Emitter Breakdown Voltage | $I_{CE} = 10\text{ mA}$, $V_{GE} = 0\text{ V}$, $R_{GE} = 0$, $T_J = -40\text{ to }150^\circ\text{C}$ | 390 | 420 | 450 | V | |
| BV_{ECS} | Emitter to Collector Breakdown Voltage | $I_{CE} = -20\text{ mA}$, $V_{GE} = 0\text{ V}$, $T_J = 25^\circ\text{C}$ | 28 | - | - | V | |
| BV_{GES} | Gate to Emitter Breakdown Voltage | $I_{GES} = \pm 2\text{ mA}$ | ± 12 | ± 14 | - | V | |
| I_{CEr} | Collector to Emitter Leakage Current | $V_{CE} = 250\text{ V}$ $R_{GE} = 1\text{ k}\Omega$ | $T_J = 25^\circ\text{C}$ | - | - | 25 | μA |
| | | | $T_J = 150^\circ\text{C}$ | - | - | 1 | mA |
| I_{ECs} | Emitter to Collector Leakage Current | $V_{EC} = 24\text{ V}$ | $T_J = 25^\circ\text{C}$ | - | - | 1 | mA |
| | | | $T_J = 150^\circ\text{C}$ | - | - | 40 | |
| R_1 | Series Gate Resistance | | - | 120 | - | Ω | |
| R_2 | Gate to Emitter Resistance | | 10K | - | 30K | Ω | |

ON CHARACTERISTICS (Note 5)

| | | | | | | |
|---------------|---|---|---|------|------|----|
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_{CE} = 6\text{ A}$, $V_{GE} = 4\text{ V}$, $T_J = 25^\circ\text{C}$ | - | 1.15 | 1.25 | V |
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_{CE} = 10\text{ A}$, $V_{GE} = 4.5\text{ V}$, $T_J = 150^\circ\text{C}$ | - | 1.35 | 1.50 | V |
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_{CE} = 15\text{ A}$, $V_{GE} = 4.5\text{ V}$, $T_J = 150^\circ\text{C}$ | - | 1.68 | 1.85 | V |
| E_{SCIS} | Self Clamped Inductive Switching | $L = 3.0\text{ mHy}$, $R_G = 1\text{ K}\Omega$, $V_{GE} = 5\text{ V}$, (Note 1) | - | - | 300 | mJ |

DYNAMIC CHARACTERISTICS

| | | | | | | | |
|--------------|-----------------------------------|---|---------------------------|------|-----|-----|---|
| $Q_{G(ON)}$ | Gate Charge | $I_{CE} = 10\text{ A}$, $V_{CE} = 12\text{ V}$, $V_{GE} = 5\text{ V}$ | - | 21 | - | nC | |
| $V_{GE(TH)}$ | Gate to Emitter Threshold Voltage | $I_{CE} = 1\text{ mA}$ $V_{CE} = V_{GE}$ | $T_J = 25^\circ\text{C}$ | 1.3 | 1.7 | 2.2 | V |
| | | | $T_J = 150^\circ\text{C}$ | 0.75 | 1.2 | 1.8 | |
| V_{GEP} | Gate to Emitter Plateau Voltage | $V_{CE} = 12\text{ V}$, $I_{CE} = 10\text{ A}$ | - | 2.8 | - | V | |

SWITCHING CHARACTERISTICS

| | | | | | | |
|---------------|---------------------------------------|--|---|-----|----|---------------|
| $td_{(ON)R}$ | Current Turn-On Delay Time-Resistive | $V_{CE} = 14\text{ V}$, $R_L = 1\text{ }\Omega$, $V_{GE} = 5\text{ V}$, $R_G = 1\text{ K}\Omega$, $T_J = 25^\circ\text{C}$ | - | 0.9 | 4 | μs |
| t_{rR} | Current Rise Time-Resistive | | - | 1.9 | 7 | |
| $td_{(OFF)L}$ | Current Turn-Off Delay Time-Inductive | $V_{CE} = 300\text{ V}$, $L = 1\text{ mH}$, $V_{GE} = 5\text{ V}$, $R_G = 1\text{ K}\Omega$, $I_{CE} = 6.5\text{ A}$, $T_J = 25^\circ\text{C}$ | - | 4.8 | 15 | |
| t_{fL} | Current Fall Time-Inductive | | - | 2.0 | 15 | |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

PACKAGE MARKING AND DEVICE ORDERING INFORMATION

| Device Marking | Device | Package | Reel Diameter | Tape Width | Qty [†] |
|----------------|-----------------|----------------|---------------|------------|------------------|
| FGD3040G2 | FGD3040G2-F085V | DPAK (Pb-Free) | 330 mm | 16 mm | 2500 |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

TYPICAL CHARACTERISTICS

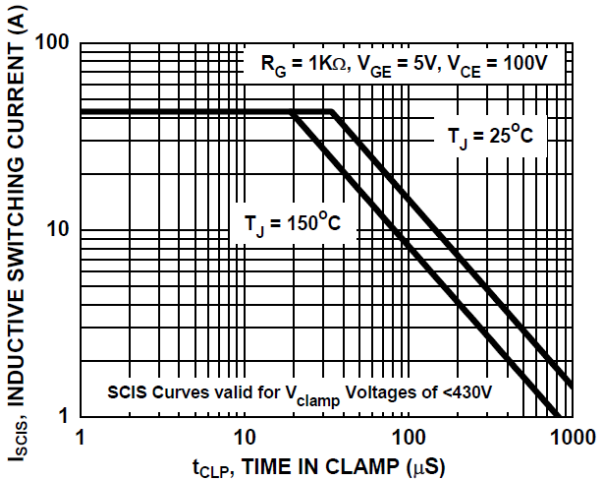


Figure 1. Self Clamped Inductive Switching Current vs. Time in Clamp

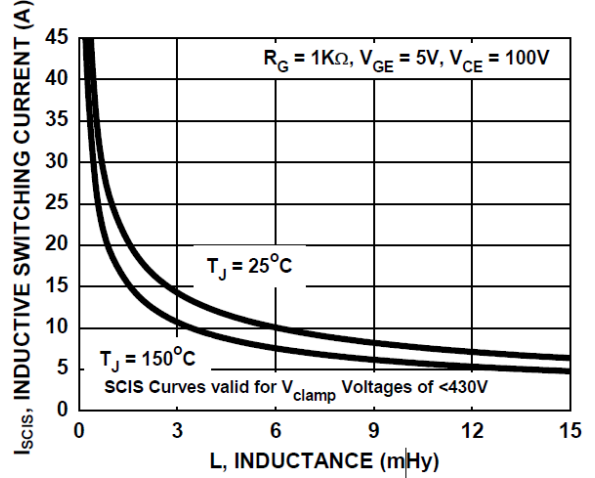


Figure 2. Self Clamped Inductive Switching Current vs. Inductance

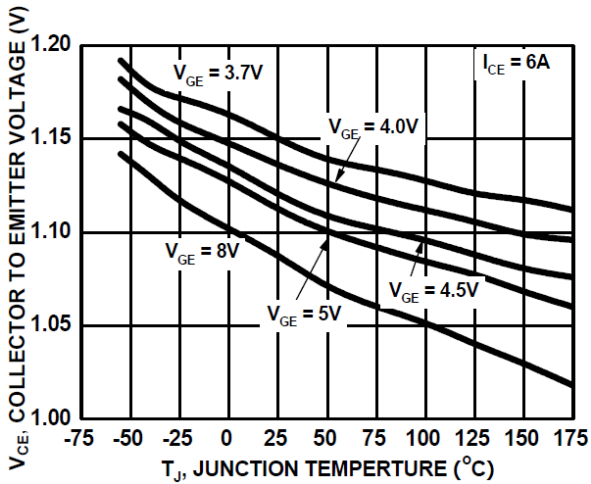


Figure 3. Collector to Emitter On-State Voltage vs. Junction Temperature

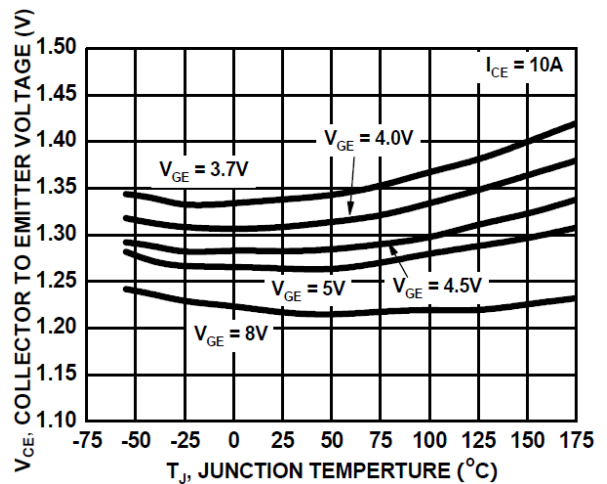


Figure 4. Collector to Emitter On-State Voltage vs. Junction Temperature

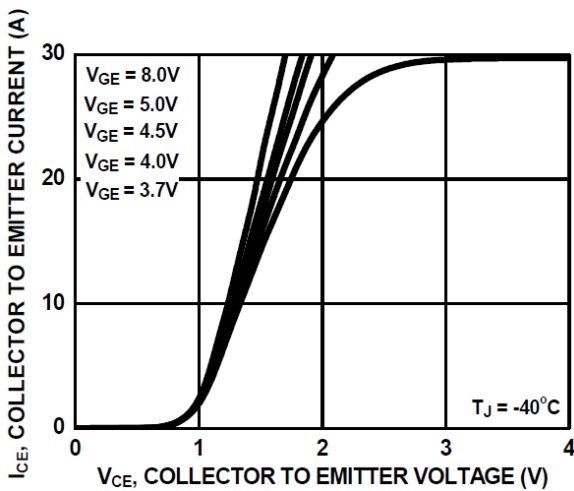


Figure 5. Collector to Emitter On-State Voltage vs. Collector Current

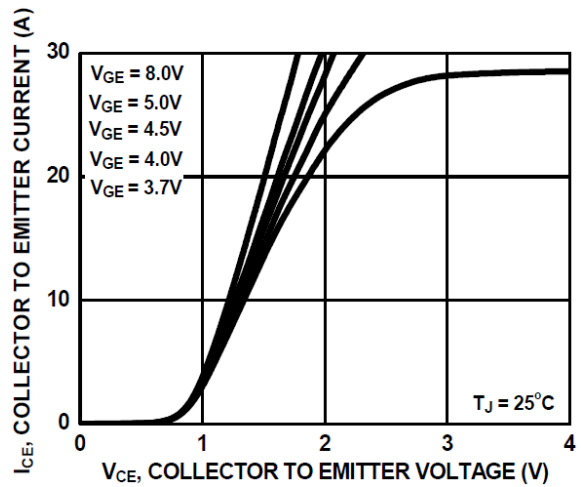


Figure 6. Collector to Emitter On-State Voltage vs. Collector Current

TYPICAL CHARACTERISTICS (continued)

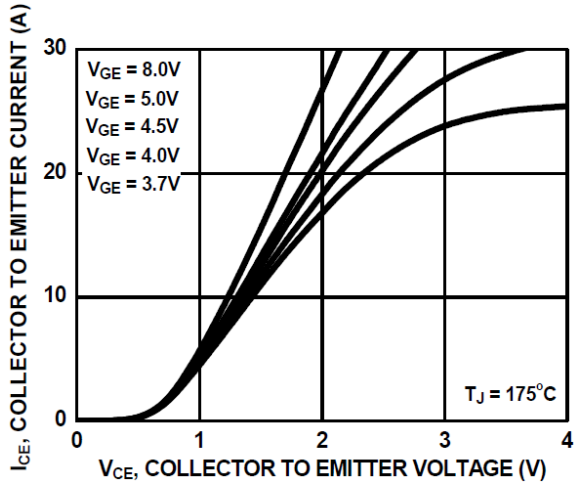


Figure 7. Collector to Emitter On-State Voltage vs. Collector Current

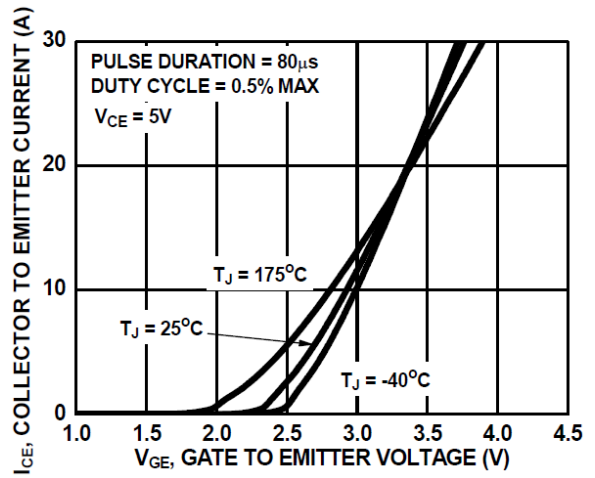


Figure 8. Transfer Characteristics

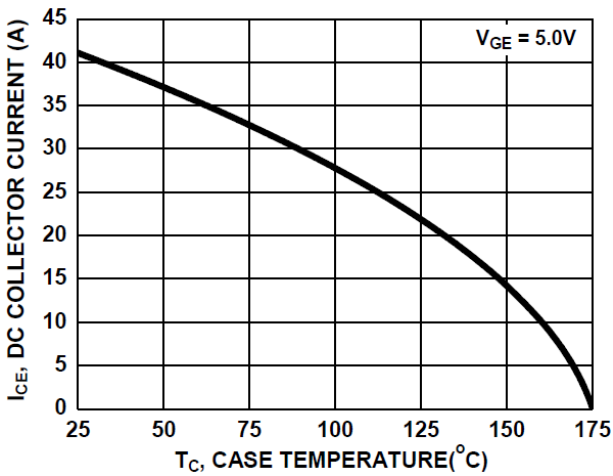


Figure 9. DC Collector Current vs. Case Temperature

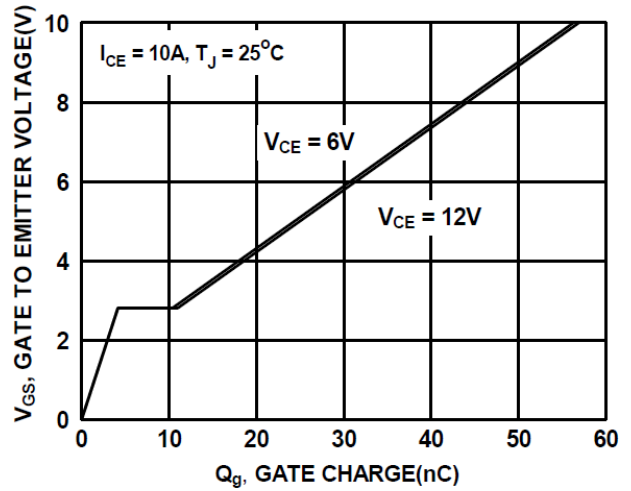


Figure 10. Gate Charge

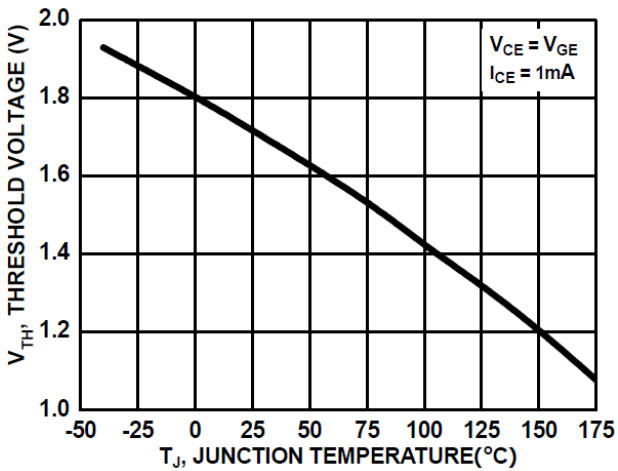


Figure 11. Threshold Voltage vs. Junction Temperature

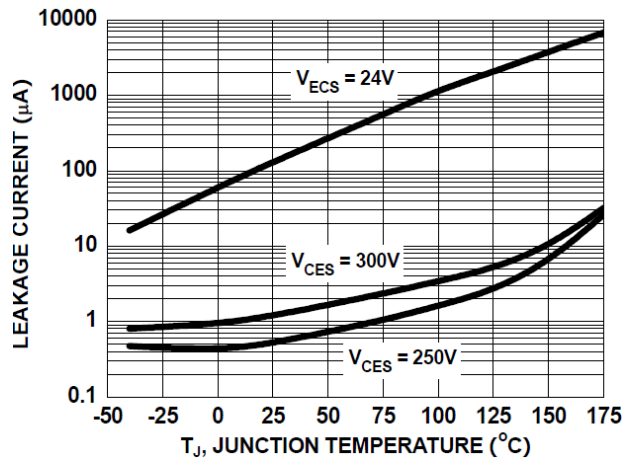


Figure 12. Leakage Current vs. Junction Temperature

FGD3040G2-F085V

TYPICAL CHARACTERISTICS (continued)

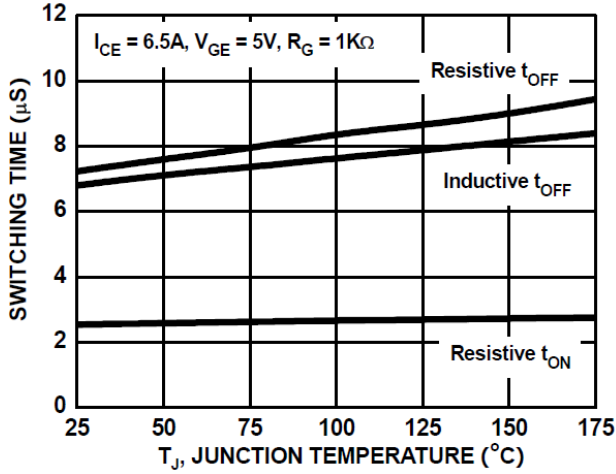


Figure 13. Switching Time vs. Junction Temperature

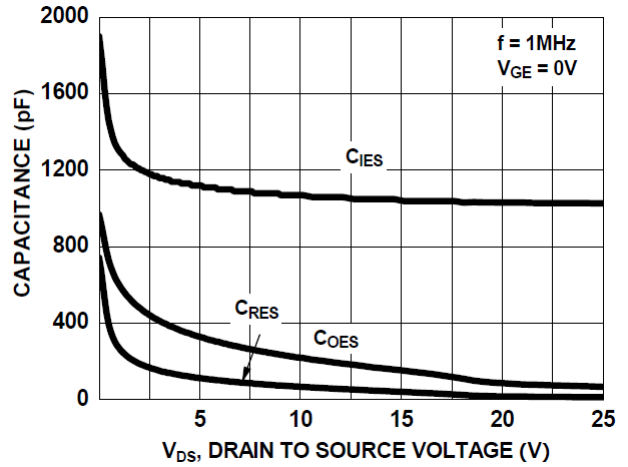


Figure 14. Capacitance vs. Collector to Emitter Voltage

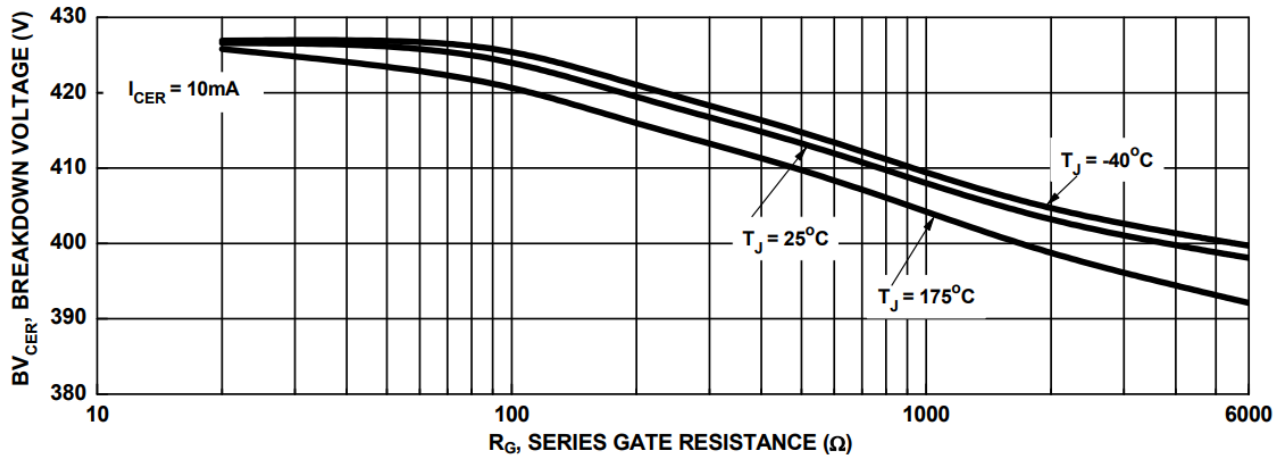


Figure 15. Break down Voltage vs. Series Resistance

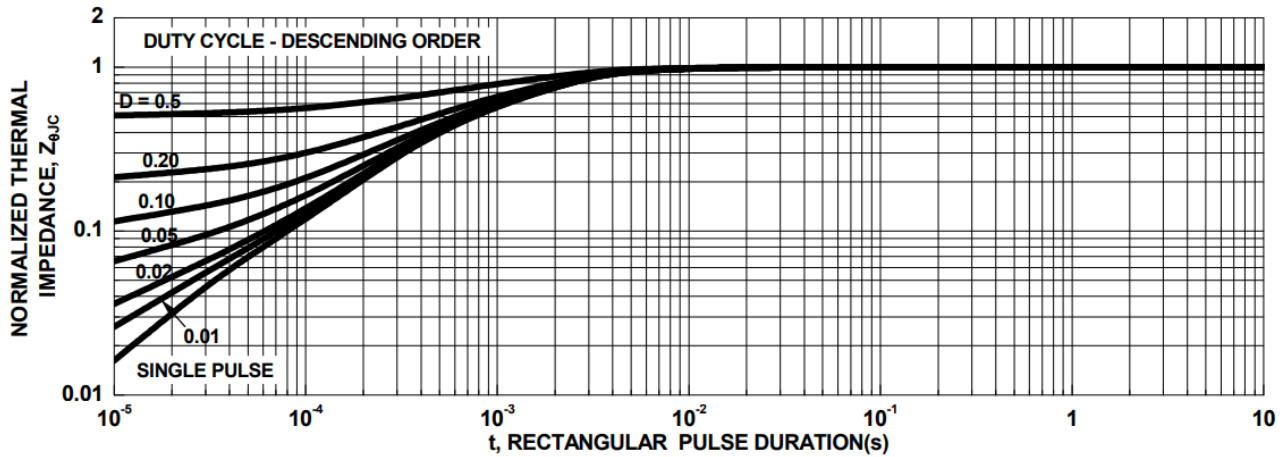


Figure 16. IGBT Normalized Transient Thermal Impedance, Junction to Case

FGD3040G2-F085V

TYPICAL CHARACTERISTICS (continued)

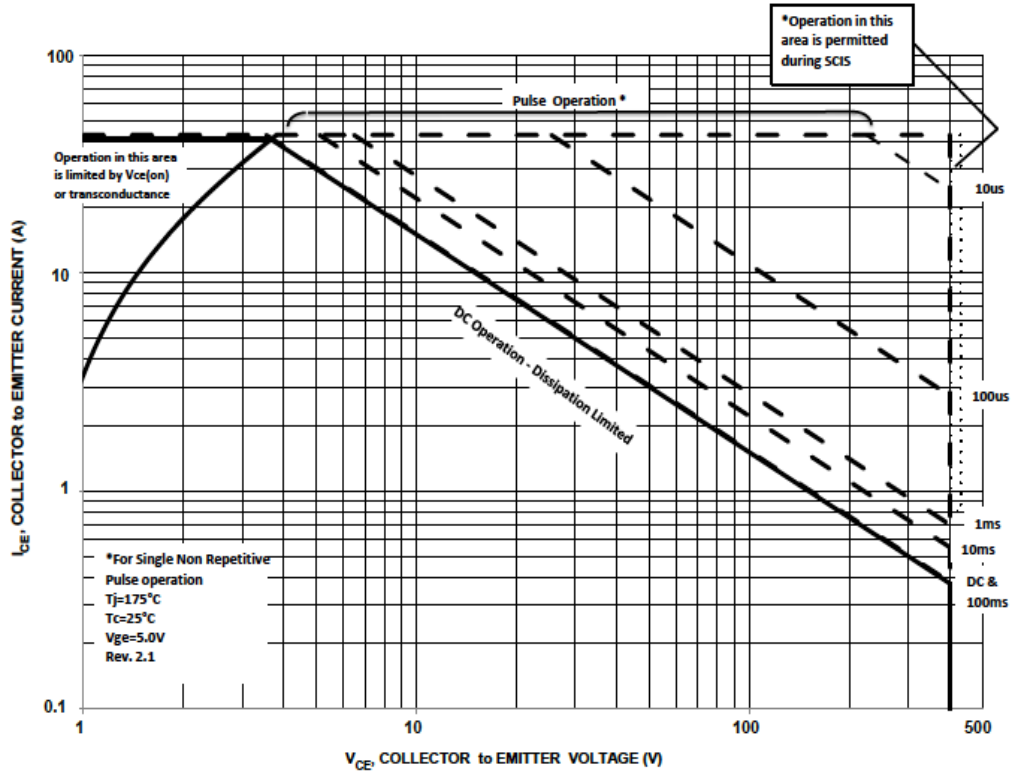


Figure 17. Forward Safe Operating Area

TEST CIRCUIT AND WAVEFORMS

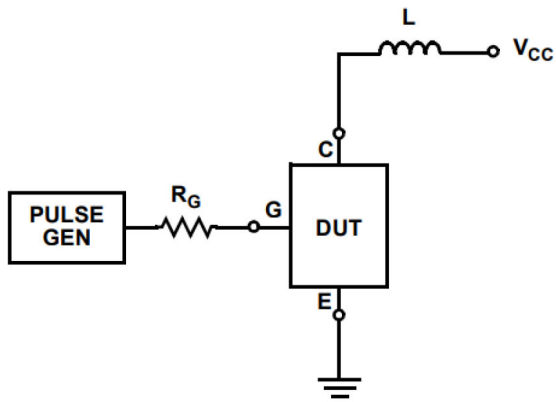


Figure 18. Inductive Switching Test Circuit

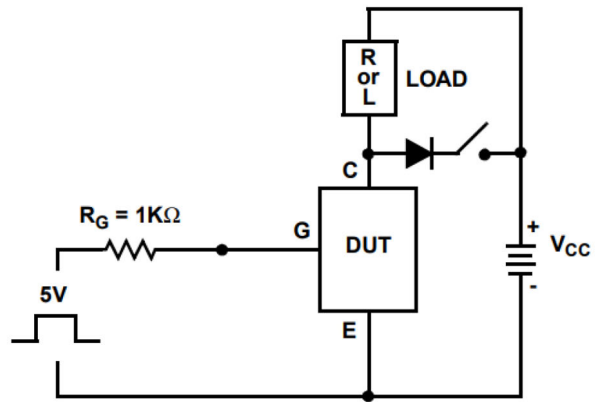


Figure 19. t_{ON} and t_{OFF} Switching Test Circuit

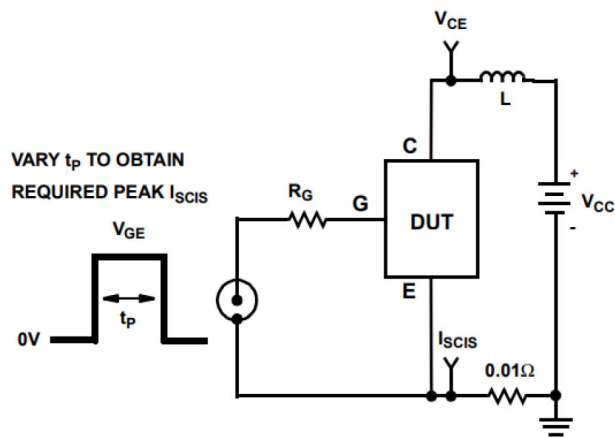


Figure 20. Energy Test Circuit


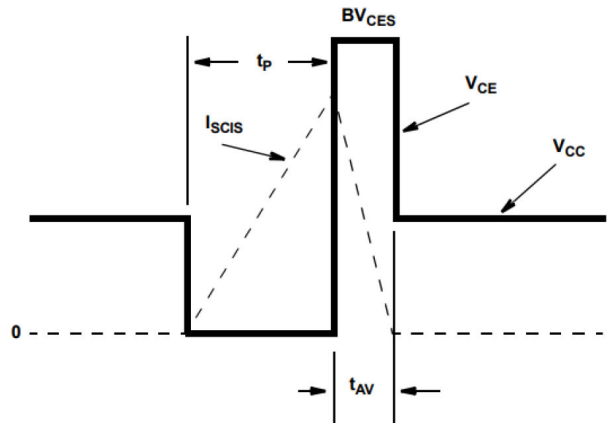



Figure 21. Energy Waveforms




DPAK (SINGLE GAUGE)
CASE 369C
ISSUE G

DATE 31 MAY 2023


SCALE 1:1

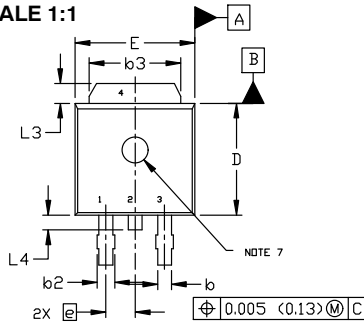



TOP VIEW

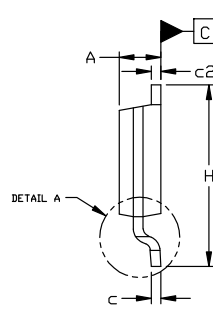

SIDE VIEW




BOTTOM VIEW



BOTTOM VIEW

ALTERNATE CONSTRUCTIONS

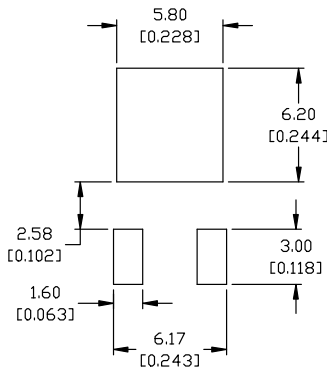

RECOMMENDED MOUNTING FOOTPRINT*

*FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.


- STYLE 1: PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR
- STYLE 2: PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN
- STYLE 3: PIN 1. ANODE
2. CATHODE
3. ANODE
4. CATHODE
- STYLE 4: PIN 1. CATHODE
2. ANODE
3. GATE
4. ANODE
- STYLE 5: PIN 1. GATE
2. ANODE
3. CATHODE
4. ANODE
- STYLE 6: PIN 1. MT1
2. MT2
3. GATE
4. MT2
- STYLE 7: PIN 1. GATE
2. COLLECTOR
3. EMITTER
4. COLLECTOR
- STYLE 8: PIN 1. N/C
2. CATHODE
3. ANODE
4. CATHODE
- STYLE 9: PIN 1. ANODE
2. CATHODE
3. RESISTOR ADJUST
4. CATHODE
- STYLE 10: PIN 1. CATHODE
2. ANODE
3. CATHODE
4. ANODE

NOTES:

1. DIMENSIONING AND TOLERANCING ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES
3. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS b3, L3, AND Z.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.
7. OPTIONAL MOLD FEATURE.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.086 | 0.094 | 2.18 | 2.38 |
| A1 | 0.000 | 0.005 | 0.00 | 0.13 |
| b | 0.025 | 0.035 | 0.63 | 0.89 |
| b2 | 0.028 | 0.045 | 0.72 | 1.14 |
| b3 | 0.180 | 0.215 | 4.57 | 5.46 |
| c | 0.018 | 0.024 | 0.46 | 0.61 |
| c2 | 0.018 | 0.024 | 0.46 | 0.61 |
| D | 0.235 | 0.245 | 5.97 | 6.22 |
| E | 0.250 | 0.265 | 6.35 | 6.73 |
| e | 0.090 | BSC | 2.29 | BSC |
| H | 0.370 | 0.410 | 9.40 | 10.41 |
| L | 0.055 | 0.070 | 1.40 | 1.78 |
| L1 | 0.114 | REF | 2.90 | REF |
| L2 | 0.020 | BSC | 0.51 | BSC |
| L3 | 0.035 | 0.050 | 0.89 | 1.27 |
| L4 | ---- | 0.040 | --- | 1.01 |
| Z | 0.155 | ---- | 3.93 | --- |

GENERIC MARKING DIAGRAM*

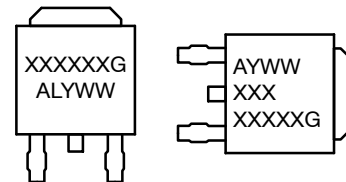

- IC
- Discrete
- XXXXXX = Device Code
- A = Assembly Location
- L = Wafer Lot
- Y = Year
- WW = Work Week
- G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| | | |
|------------------|---------------------|--|
| DOCUMENT NUMBER: | 98AON10527D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | DPAK (SINGLE GAUGE) | PAGE 1 OF 1 |

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales